



HISAKA

誠心

...WITH OUR SINCERITY
"MAGOKORO"

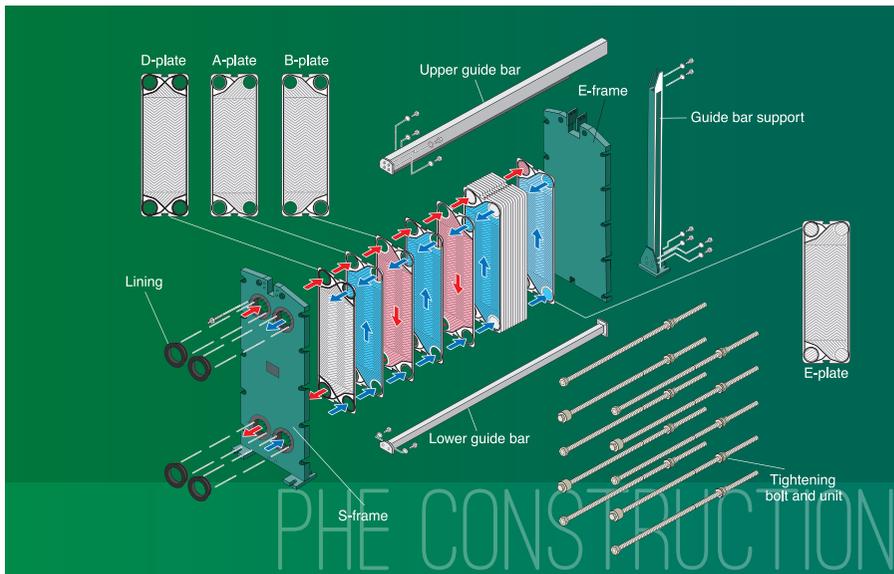


INDUSTRIAL CATALOGUE

HVAC&R

Special Plates Design for Individual Applications,
To Support HVAC&R Technology

**HISAKA
PLATE HEAT
EXCHANGER
FOR HVAC APPLICATION**



The Plate Heat Exchanger has the highest heat transfer efficiency among various types of heat exchangers and has been applied in various industries, i.e., chemical, food, marine, and many other general industries. Hisaka plate heat exchangers have various types of models and the SX-series is particularly designed for the HVAC industry.

GENERAL SPECIFICATION:












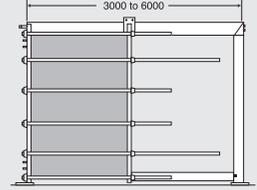

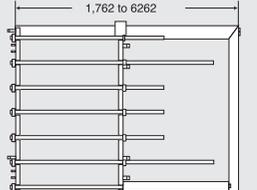
- Pressure Rating : Full Vacuum to 30kg/cm²G
- Temperature Rating : - 30°C - 180°C
- Flow Rate / Unit : 0.1m³/hr to 5000m³/hr
- Plate Material : 304SS, 316SS, Titanium and many others
- Gasket Material : NBR, EPDM and many others



**SX-Series
PLATE HEAT EXCHANGER (PHE)**

Hisaka Works has developed various characteristic plates in order to accommodate the wide variety of process conditions. Among these, the SX-Series has been developed as the most suitable plate heat exchanger (PHE) for high NTU operating conditions. The term NTU, or also known as 'Number of heat transfer units', indicates high heat transfer effectiveness (large temperature change between the inlet and outlet against very small temperature difference between two flowing mediums as shown in Figure 1 and Figure 2 at Page 4). The adoption done to a high-NTU plate is to utilize a pattern with a shallower plate depth and a smaller pitch. This ensures an excellent heat transfer performance. This is the specialty of the SX-Series plate heat exchanger which has been developed for the purpose of achieving the extremely high NTU with the unique plate pattern.

SX-SERIES DIMENSIONAL OVERVIEW

Main Specification			Standard Frame Type	
			Height/Width	NP Model
SX 10	Max. flow rate per unit	83m³/h		
	Connection diameter	50mm		
SX 20	Max. flow rate per unit	220m³/h		
	Connection diameter	100mm		
SX 30	Max. flow rate per unit	445m³/h		
	Connection diameter	150mm		
SX 40	Max. flow rate per unit	940m³/h		
	Connection diameter	200mm		
SX 70	Max. flow rate per unit	1,340m³/h		
	Connection diameter	250mm		
SX 80	Max. flow rate per unit	2,300m³/h		
	Connection diameter	350mm		
SX 90	Max. flow rate per unit	2,600m³/h		
	Connection diameter	350mm		

A DEDICATED HIGH PERFORMANCE PHE FOR DISTRICT COOLING (DCS)

The SX-Series has been developed as the most suitable HISAKA Plate Heat Exchanger corresponding to larger temperature change of up to 10°C while the conventional heat exchanger can only provide a 5°C to 7°C. HISAKA Plate Heat Exchangers are able to do so because we have produced a unique and excellent plate pattern that is a class above the ordinary plates.

The SX-Series utilize a closed loop circulation system, a system providing for operations with large temperature change (High NTU) between flowing medium at the inlet and outlet temperatures, as shown in figure 2. It also demonstrates that there is a very small temperature difference between the two flowing mediums. With this unique feature, the cost of the HVAC system can be lowered because of the low flow rate along with high NTU characteristics. In explanation, the build-up cost and operational costs which includes the running cost of the building are also lowered. The most economical and optimum designs are made available by our host computer from Japan to produce the best plate heat exchanger through our unique variety of heat transfer plates. HISAKA plate heat exchangers, producing quality and certified by our reputation.



SX SERIES

As shown in the table, there is a reduced flow rate which allows smaller piping size. The reduced piping size will result in decreased piping costs, lesser amount of piping insulation material, and lower piping pumping energy.

With the reduced flow rate, one can expect for reduce in the user-side fan energy and also the smaller duct size too. This again, is reducing costs. The SX-series, on the whole, creates such possible benefits due to its optimal NTU designs, with NTU 5 to NTU 10, producing an excellent heat recovery performance yet only optimizing a compact space.

In conclusion, the significant cost saving benefits the SX-series can accommodate in many applications such as DCP, ice storage system, and free cooling.

And it contributes to energy saving and reduce running costs in many applications such as DC, ice storage system and free cooling.

Figure 1:


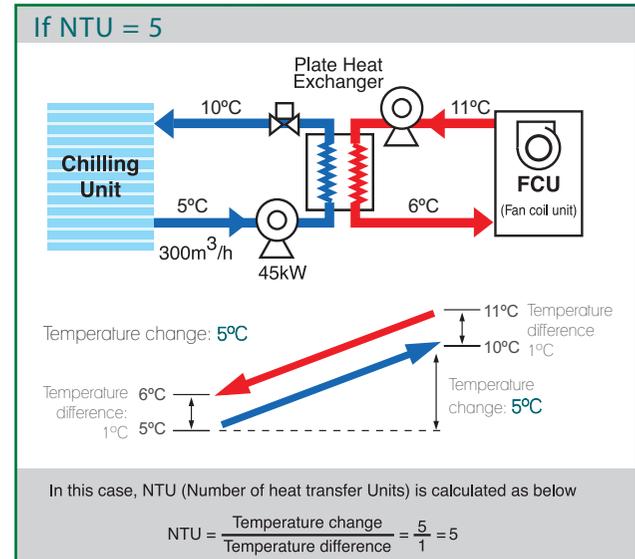


Figure 2:

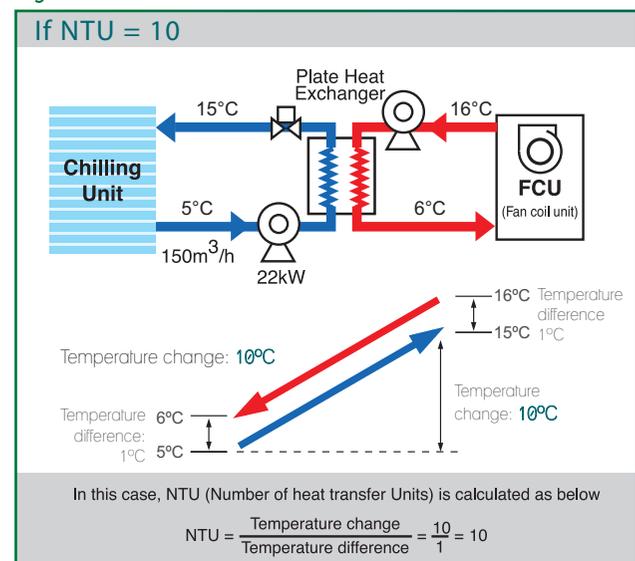

An example of cost down for installation and operating costs by changing flow rate:

Cost Down Item	NTU=5	NTU=10	Advantage
Circulating Flow Rate	300m³/h	150m³/h	Lower Flow Rate (50% Deduction)
Piping Size	250A*	150A*	Smaller Piping Size and less insulation (40% cost down)
Piping Energy (head : 20m)	30kW*	15kW*	Less Pumping Energy Consumption (50% cost down)
Piping Energy (head : 30m)	45kW*	22kW*	

PRESSURE BREAKER BY HISAKA


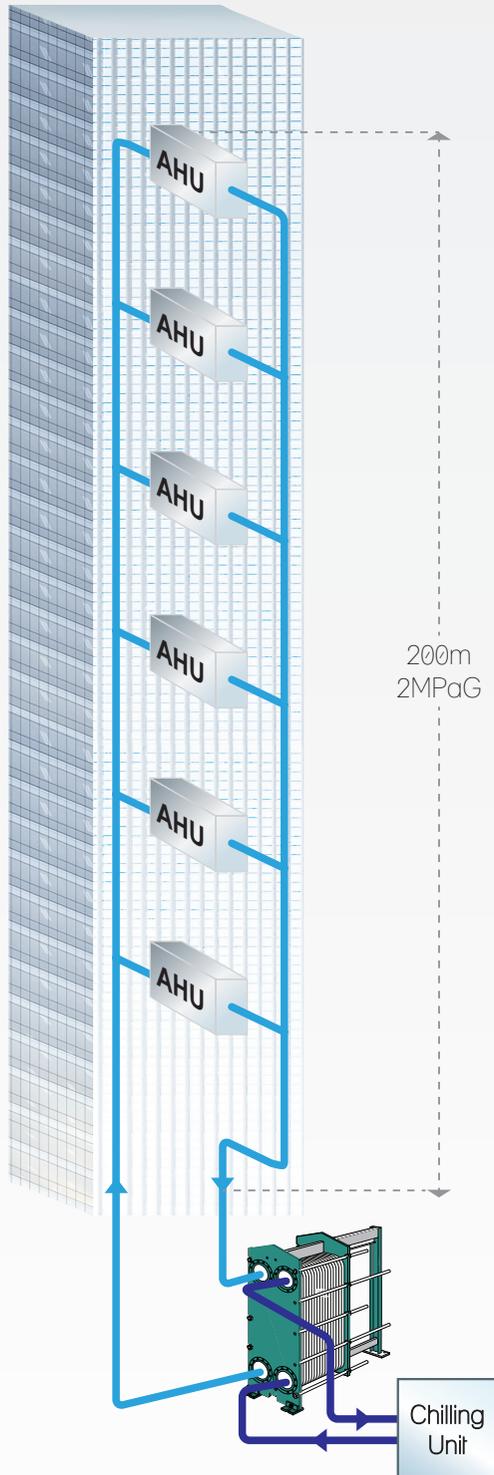


Plate heat exchangers must be extremely durable and able to withstand high pressure. One major feature of the "SX Series" is that it has strong pressure resistance together with super high NTU characteristics. For example, with successively tallest buildings, the pressure of the circulation water required for air conditioning increases, resulting in a great load on the heat source. In such a case, a plate heat exchanger reduce the pressure on the heat source, lower the risk of breakdown.

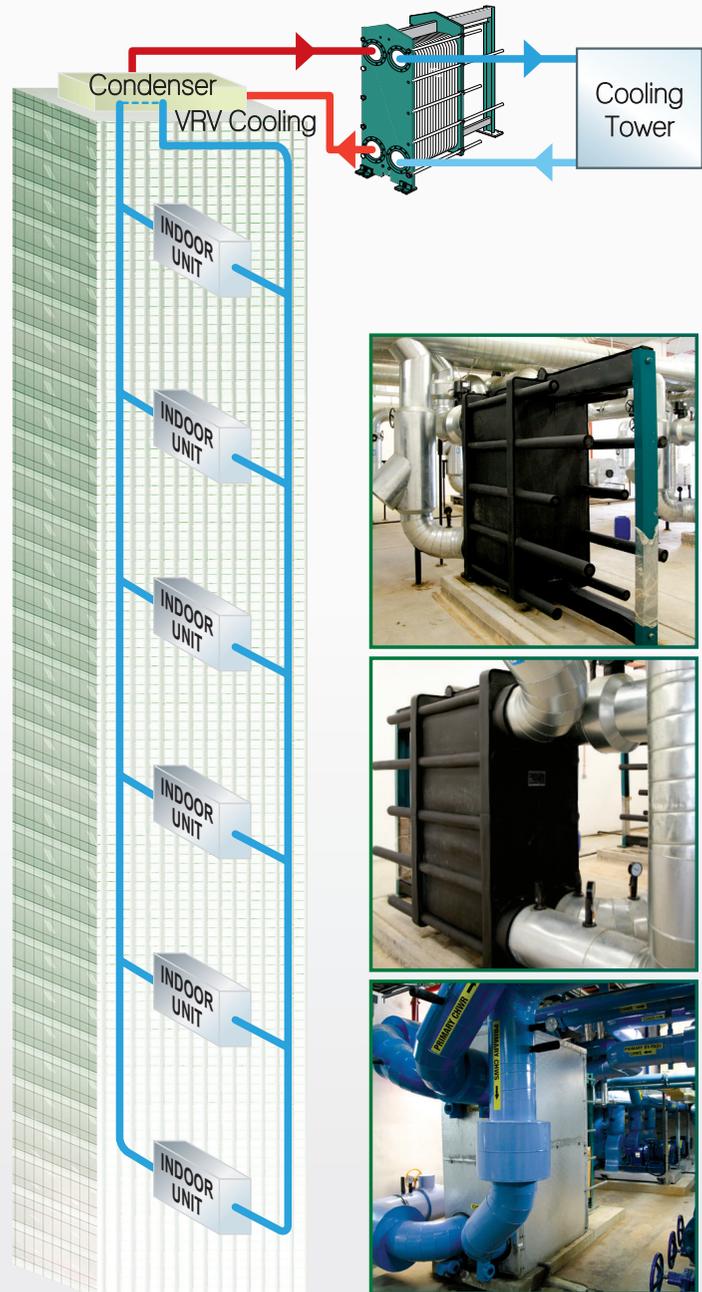
GREEN BUILDING CONCEPT



The conventional way of air conditioning emits hot air. The modern way prevents such emission with the use of the plate heat exchanger through water cool air conditioning system.

- Suitable for office tower block
- Variable heat load usage
- The centralized air con system is cooled by the plate heat exchanger

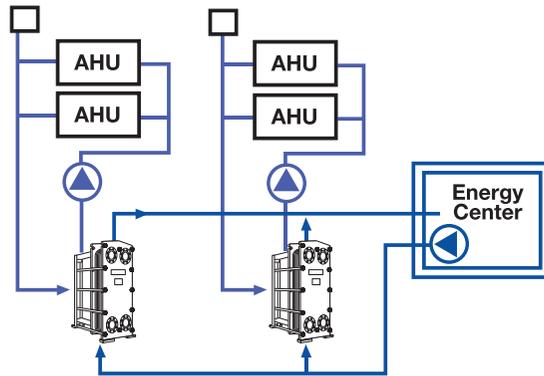DISTRICT COOLING PLANT




TOKYO METROPOLITAN GOVERNMENT




PUTRAJAYA GREEN BUILDING

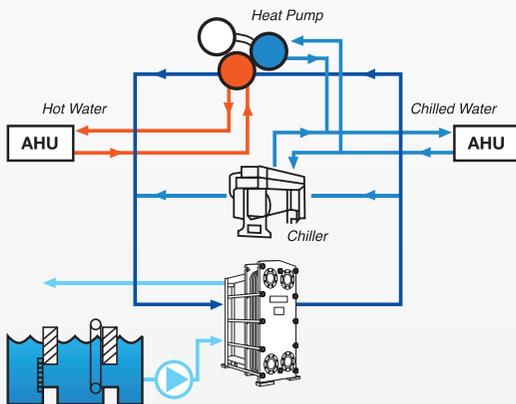PLATE HEAT EXCHANGER FOR UTILIZATION OF NATURAL ENERGY



HONG KONG CONVENTION AND EXHIBITION CENTRE

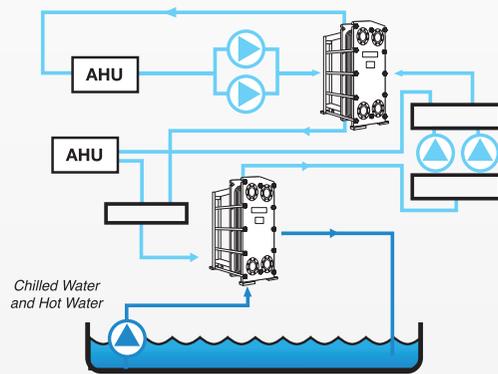PLATE HEAT EXCHANGER FOR ACCUMULATING BATH




SHIRATORI MUSEUM PLAZA

HISAKA CREATING A COMFORTABLE URBAN ENVIRONMENT

Global warming is constantly a serious problem in our modern world. The results of the pace of industrialization require a need of more green ideas. At Hisaka, plate heat exchangers are regarded as a key technology that powerfully supports the society to generate optimum productivity of results such as DCP, cogeneration systems, and heat pump systems. Hisaka offers higher efficiency and higher energy conservation while diligently constantly developing better plate technologies. HISAKA continues to labour for a higher improvement not only to our products but through the entire organization, we ensure continuous innovation and originality for Plate Heat Exchangers



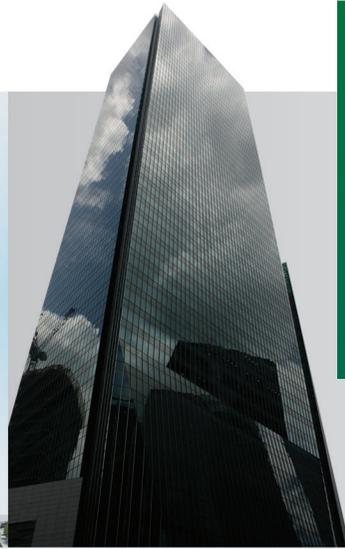CWTC
(BEIJING, CHINA)



ONE RAFFLES QUAY
(SINGAPORE)



KL SENTRAL LOT G
(HOTEL & OFFICE TOWERS)



HONG KONG CONVENTION CENTRE
(HONG KONG)



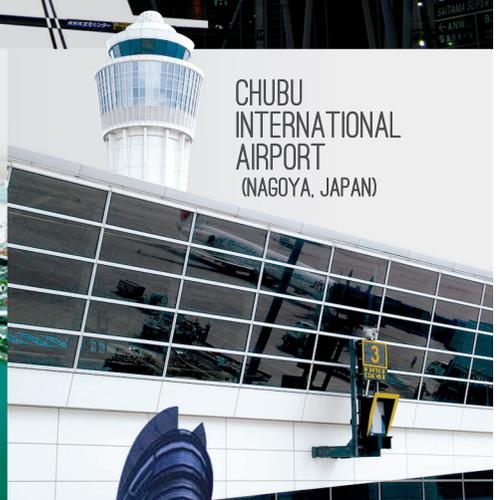
SAITAMA SUPER ARENA
(TOKYO, JAPAN)



PUTRAJAYA
4G7



UNIMAS
(KUCHING, MALAYSIA)



CHUBU
INTERNATIONAL
AIRPORT
(NAGOYA, JAPAN)



MM21
TOKYO, JAPAN)



PUTRAJAYA CONVENTION CENTRE
(KL, MALAYSIA)



PLATINUM
PARK
(KL, MALAYSIA)

HVAC&R

HISAKA

**WE are
HERE**
HISAKA, YOUR TRUSTED ASIAN BRAND

www.hisaka-asia.com

PRODUCT CATALOGUE

HVAC & R



HISAKAWORKS S.E.A SDN BHD

Company No. 671059-K
(South East Asia Headquarters)
No 2, Jalan TP 2, Taman Perindustrian SIME UEP,
47600 Subang Jaya, Selangor Darul Ehsan, Malaysia
Tel : +603 5880 4185
Fax : +603 8081 7185
Email : heatexc@hisaka-asia.com

HISAKA WORKS, LTD

OSAKA : 2-1-48, Higashi-konoike-cho,
Higashi-Osaka, Osaka, 578-0973, Japan
Tel : +81 72 966 9601
Fax : +81 72 966 9602

TOKYO : NTC Building 1-11-12,
Kyobashi Chuo-Ku, Tokyo, 104-0031, Japan
Tel : +81 3 5250 0760
Fax : +81 3 3562 2759

HISAKAWORKS THAILAND CO., LTD.

BANGKOK (Sales Office):
16 Soi Onnut 62, Kwang Suanluang,
Khet Suanluang, Bangkok, 10250 Thailand
Tel : +66 2704 6038/+66 2704 6039
Fax : +66 2704 6037
Email : heatexc@hisaka-thai.com

RAYONG (Service Center) :

300/118, Moo 1, Tambol Tasit,
Amphoe Pluakdaeng, Rayong 21140
Tel : +66 3301 2088
Fax : +66 3301 2089
Email : heatexc@hisaka-thai.com

HISAKAWORKS SINGAPORE PTE LTD (Sales Office)

No.18, Boon Lay Way, #02-118 Trade Hub 21
Singapore 609966
Tel : +65 6897 8489
Fax : +65 6686 4579
Email : heatexc@hisaka-sing.com

HISAKAWORKS INDONESIA (Sales Representative Office)

Kompleks Intercon Plaza block D8-9, Jl. Meruya Ilir Raya,
Taman Kebon Jeruk, Jakarta 11630, Indonesia
Tel : +62 021 5890 1302 (Hunting)
+62 021 586 0158, +68 12 8189 1880
Fax : +62 021 530 4380, +62 021 530 4885
Email : hisakindo@hisaka-asia.com

HISAKAWORKS VIETNAM (Sales Representative Office)

Hoang Dan Building, 47-49, Hoang Sa Street,
Da Kao Ward, District 1, Ho Chi Minh City, Vietnam
Tel : +84 8 3910 7355
Fax : +84 8 3910 7356
Email : hisavina@hisaka-asia.com

HISAKAWORKS PHILIPPINES (Sales Representative Office)

Suite 22C Level 22, Tower One Ayala Triangle,
Ayala Avenue, Makati City, 1226 Manila, Philippines
Tel : +632 368 5676
Fxs : +632 368 5757
Email : hisapino@hisaka-asia.com

